
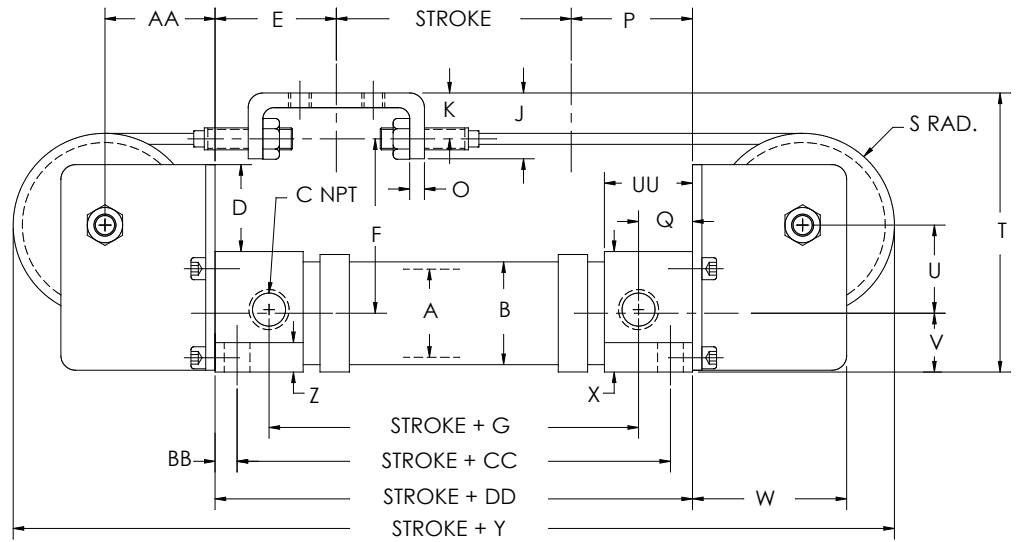
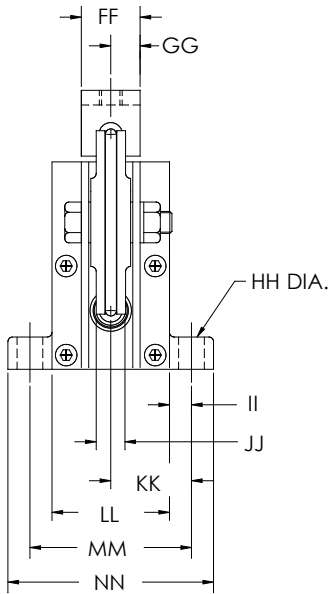


### DOUBLE END - CD

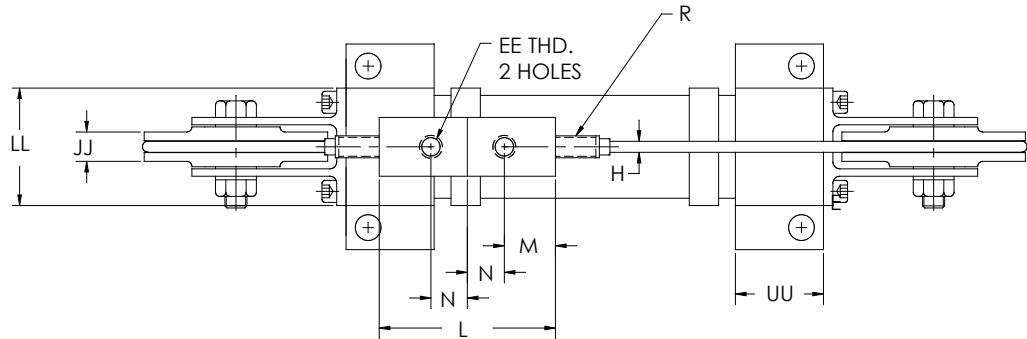

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
15	1.50	1.75	3/8	1.48	2.06	3.00	2.31	.18	1.12	.75	3.00	.88	.62	.25	2.06	.91	3/8-24 x 1.68	1.59	4.75	1.50	1.00	2.62	2.00	11.06	.50
20	2.00	2.25	3/8	1.88	2.06	4.25	2.31	.25	1.88	1.25	4.00	1.00	1.00	.38	2.06	.91	5/8-18 x 1.63	2.25	6.75	2.12	1.25	3.50	2.50	13.88	.50
25	2.50	2.75	3/8	1.52	2.06	4.25	2.31	.25	1.88	1.25	4.00	1.00	1.00	.38	2.06	.91	5/8-18 x 1.63	2.25	7.00	2.12	1.50	3.50	3.00	13.86	.50
32	3.25	3.50	1/2	1.88	2.72	5.31	3.12	.31	1.88	1.25	5.25	1.62	1.00	.38	2.72	1.03	3/4-16 x 2.25	2.81	8.44	2.66	1.88	4.32	3.75	17.68	.75
40	4.00	4.25	1/2	2.27	2.72	6.00	3.38	.38	1.88	1.25	5.25	1.62	1.00	.38	2.72	1.03	3/4-16 x 2.50	3.19	9.50	3.00	2.25	5.38	4.50	19.58	.88
20P	2.00	2.25	3/8	1.88	2.06	4.00	2.31	.25	1.88	1.25	5.25	1.62	1.00	.38	2.06	.91	5/8-18 x 1.63	2.12	6.49	2.00	1.24	3.62	2.50	14.36	.50
25P	2.50	2.75	3/8	2.12	2.78	5.31	3.75	.38	1.88	1.25	5.25	1.62	1.00	.38	2.78	.91	3/4-16 x 2.50	2.84	8.06	2.66	1.50	4.32	3.00	17.88	.50

MODEL	AA	BB	CC	DD	EE	FF	GG	HH	II	JJ	KK	LL	MM	NN	UU
15	1.88	.38	3.38	4.12	3/8-16	1.00	.50	.44	.38	.50	1.38	2.00	2.75	3.50	1.50
20	2.62	.38	3.38	4.12	3/8-24	1.50	.75	.44	.38	.68	1.62	2.50	3.25	4.00	1.50
25	2.62	.38	3.38	4.12	3/8-24	1.50	.75	.44	.38	.68	1.88	3.00	3.75	4.50	1.50
32	3.31	.50	4.44	5.44	3/8-24	2.00	1.00	.56	.50	.68	2.38	3.75	4.75	5.75	1.75
40	3.88	.50	4.44	5.44	3/8-24	2.00	1.00	.56	.50	.86	2.75	4.50	5.50	6.50	1.75
20P	3.00	.38	3.38	4.12	3/8-24	2.00	1.00	.44	.38	.62	1.62	2.50	3.25	4.00	1.50
25P	3.31	.38	4.81	5.56	3/8-24	2.00	1.00	.44	.38	.68	1.88	3.00	3.75	4.50	1.50

Dimensions in inches

Tolerance on Overall Length is  $\pm 1/16"$

Reed Switch Option Increases Overall Length by 2"